

CENTRIFUGAL EXHAUST FANS

ASPIR BIG SUPER

➔ for duct application

➔ for wall mounting



Ø 100 - 120 - 150 mm

DESCRIPTION:

High performance product with a unique design, suitable for installation in domestic kitchens and other environments where are required high airflow and pressure. The structural elements of this product allows its installation on 100, 120 and 150 mm diameter exhaust pipes and, by means of a specific accessory, can be also channelled in the inlet using the same diameter of the exhaust pipe, even in aspiration.

MAIN FEATURES:


- Universal drain holes coupling Ø100 - Ø120 - Ø150 mm with special mounting plate, supplied.
- Made of shockproof and heat resistant ABS plastic.
- Induction motor - Insulation class B - 2800 Rpm with self lubricating bushes.
- Overheat protection incorporated in the motor.
- Universal fixing on Ø10-12-15 cm exhaust pipes by means of specific anchor plate, supplied.
- Non-return butterfly shutter that prevents the return of smoke and odours.



ACCESSORIES:

- Ring for extraction pipe application. It is applied on the extraction inlet of the fan, provided for Ø 10-12-15 cm aluminium ducts and for Ø 10-12,5-16 cm PVC ducts.

DIMENSIONS

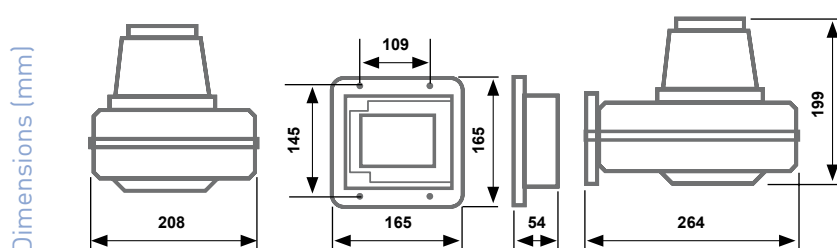

TECHNICAL SPECIFICATIONS

CODE	MODEL	m ³ /hr	Pt max mmH ₂ O	V	Hz	W	dB(A) 1,5mt	Kg
AP1933	ASPIRBIG SUPER	330	27	230	50	75	68	1,68

ACCESSORIES

ACCESSORY FOR AIR EXPULSION DUCTS APPLICATIONS

CODE	MODEL
AP1958	ASPIRTUBIG



CHARACTERISTIC CURVES

ASPIRBIG SUPER

