

# IN-LINE CENTRIFUGAL FANS

## ASPIRKAPPA SERIES

➔ for in-line duct application



∅ 100 or 120 mm (pipes)

### DESCRIPTION:


Classic design of the products, destined to be installed between two ducts of 100 or 120 mm diameter. Thanks to their small size, these centrifugal fans are also used in false ceilings applications with limited space and can be installed in any duct section.



### MAIN FEATURES:

- Made of shockproof and heat resistant ABS plastic.
- Induction motor - Insulation class B - 2800 Rpm with self lubricating bushes.
- Overheat protection incorporated in the motor.
- Non-return butterfly shutter for preventing the smoke and odours returning in the environment, supplied.

## DIMENSIONS

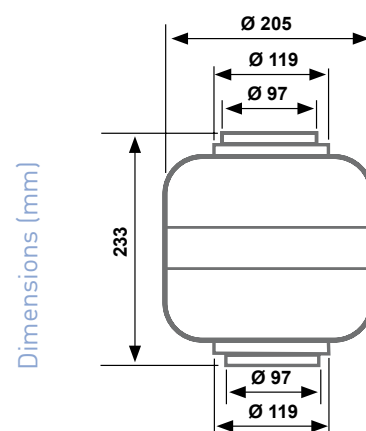


## TECHNICAL SPECIFICATIONS

| CODE   | MODEL            | m <sup>3</sup> /hr | Pt max<br>mmH <sub>2</sub> O | V   | Hz | W  | dB(A)<br>1,5mt | Kg   |
|--------|------------------|--------------------|------------------------------|-----|----|----|----------------|------|
| AP2253 | ASPIRKAPPA       | 135                | 11,50                        | 220 | 50 | 40 | 46             | 1,28 |
| AP2261 | ASPIRKAPPA SUPER | 175                | 17,50                        | 220 | 50 | 45 | 52             | 1,45 |

# CHARACTERISTIC CURVES

## ASPIRKAPPA

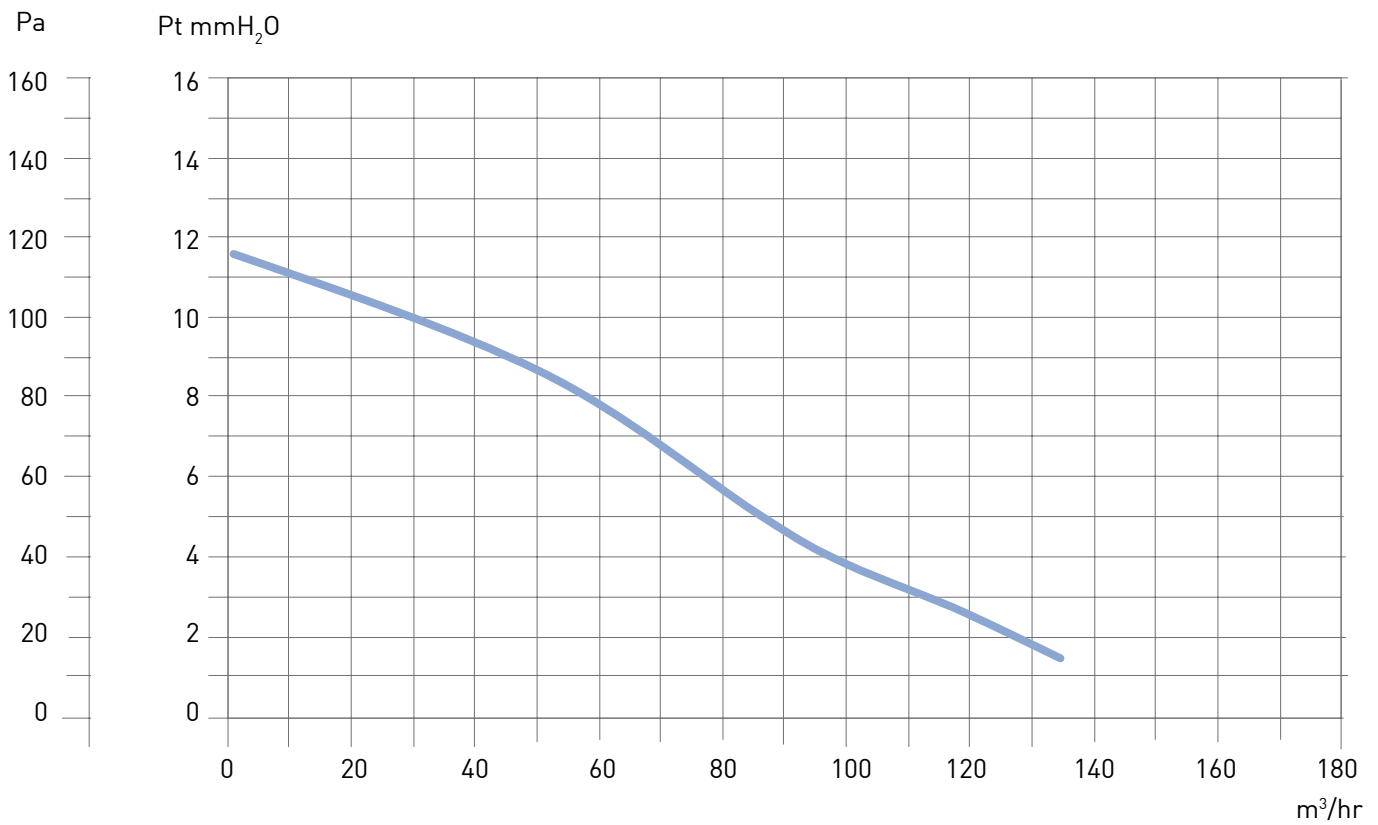

## ASPIRKAPPA SUPER

