

ELECTRIC HAND DRYERS

KALIMAX SERIES 25A

➔ photocell operation

➔ different covers

DESCRIPTION:

Functional and robust, it guarantees a long operation life. Thanks to its powerful motor, it ensures a constant temperature of the warm air and complete hand drying in only 35 seconds.

Elegant and modern, it perfectly fits any environments and satisfies even the most "demanding" requests.

MAIN FEATURES:


- Photocell functioning.
- Cover characteristic:
 - KALIMAX 25A-VB in white enamelled steel.
 - KALIMAX 25A-VB in glazed steel.
- Cover closure system with screws.
- Support basic characteristic in black enamelled cast aluminium.
- Air outlet pipe with 360° adjustable positions.



IPX1 Cl.I ϵ e



DIMENSIONS

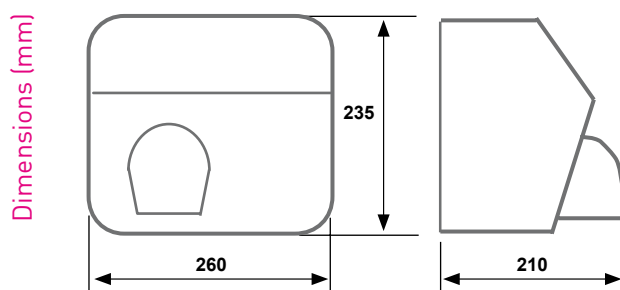

TECHNICAL SPECIFICATIONS

WITH PHOTOCCELL FUNCTIONING

CODE	MODEL	color	V	Hz	W	air speed m/sec	air flow m3/hr	air temperature °C	Kg
AP9308	KALIMAX 25A-VB	□	230	50	2300	19	210	62	4,6
AP9324	KALIMAX 25A-SO	■	230	50	2300	19	210	62	4,6