

AXIAL EXTRACTOR FANS IN KIT

EVOLUTION KL SERIES

➔ for direct outdoor expulsion

➔ false ceiling installation



Ø 100 - 120 - 150 mm

DESCRIPTION:


Its refined design, performances, silent functioning mode and the installation kit make the KL line suitable for floors and false ceiling application allowing to place the two opposite points, air extraction and expulsion, to a distance of up to 3 meters.

MAIN FEATURES:

- Made of shockproof and heat resistant ABS plastic.
- Induction motor - Insulation class B - 2500 Rpm with self lubricating bushes.
- Fusible protection incorporated in the motor.
- Wall mounting brackets incorporated in the fan.
- 2 protection grilles included.
- 3 meters of flexible PVC duct included.
- 4 tube fastening clamps included.




IPX4 CE

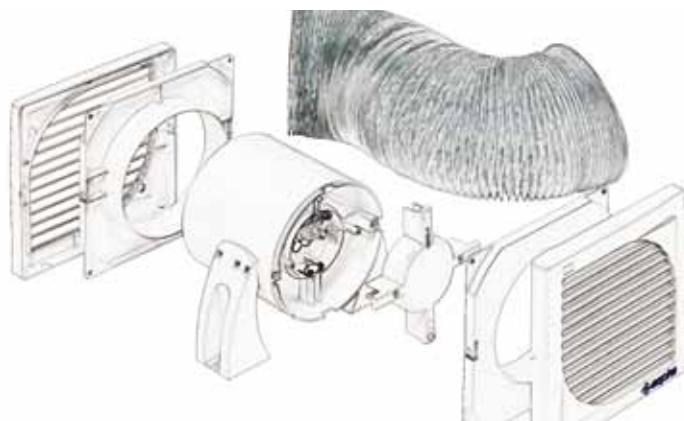


DIMENSIONS

MODEL	A	B	C	ØD	E	F
KL 10/4"	136	160	100	95,5	3 mt	165x165
KL 12/5"	147	182	109	118	3 mt	165x165
KL 15/6"	162	211	114	147	3 mt	165x165

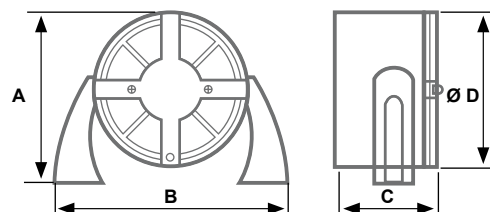

Dimensions (mm)

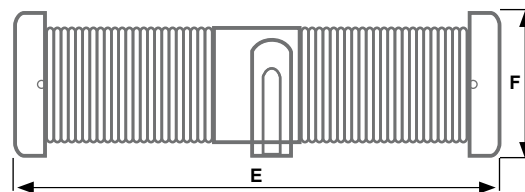

TECHNICAL SPECIFICATIONS

STANDARD - S

CODE	MODEL	m ³ /hr	Pt max mmH ₂ O	V~	Hz	W	dB(A) 1,5mt	Kg
AP0281	KL 10/4" S	75	2,4	230-240	50	16	37	1,10
AP0307	KL 12/5" S	175	4,25	230-240	50	20	40	1,30
AP0364	KL 15/6" S	250	3,75	230-240	50	26	44	1,50


WITH ELECTRONIC TIMER - T

The fan starts to operate when the light switched on and it continues to work for a programmable period of time between 45 seconds and 30 minutes, after the light is switched off.


CODE	MODEL	m ³ /hr	Pt max mmH ₂ O	V~	Hz	W	dB(A) 1,5mt	Kg
AP0299	KL 10/4" T	75	2,4	230-240	50	16	37	1,10
AP0356	KL 12/5" T	175	4,25	230-240	50	20	40	1,30
AP0372	KL 15/6" T	250	3,75	230-240	50	26	44	1,50

CHARACTERISTIC CURVES

KL SERIES 10/4"

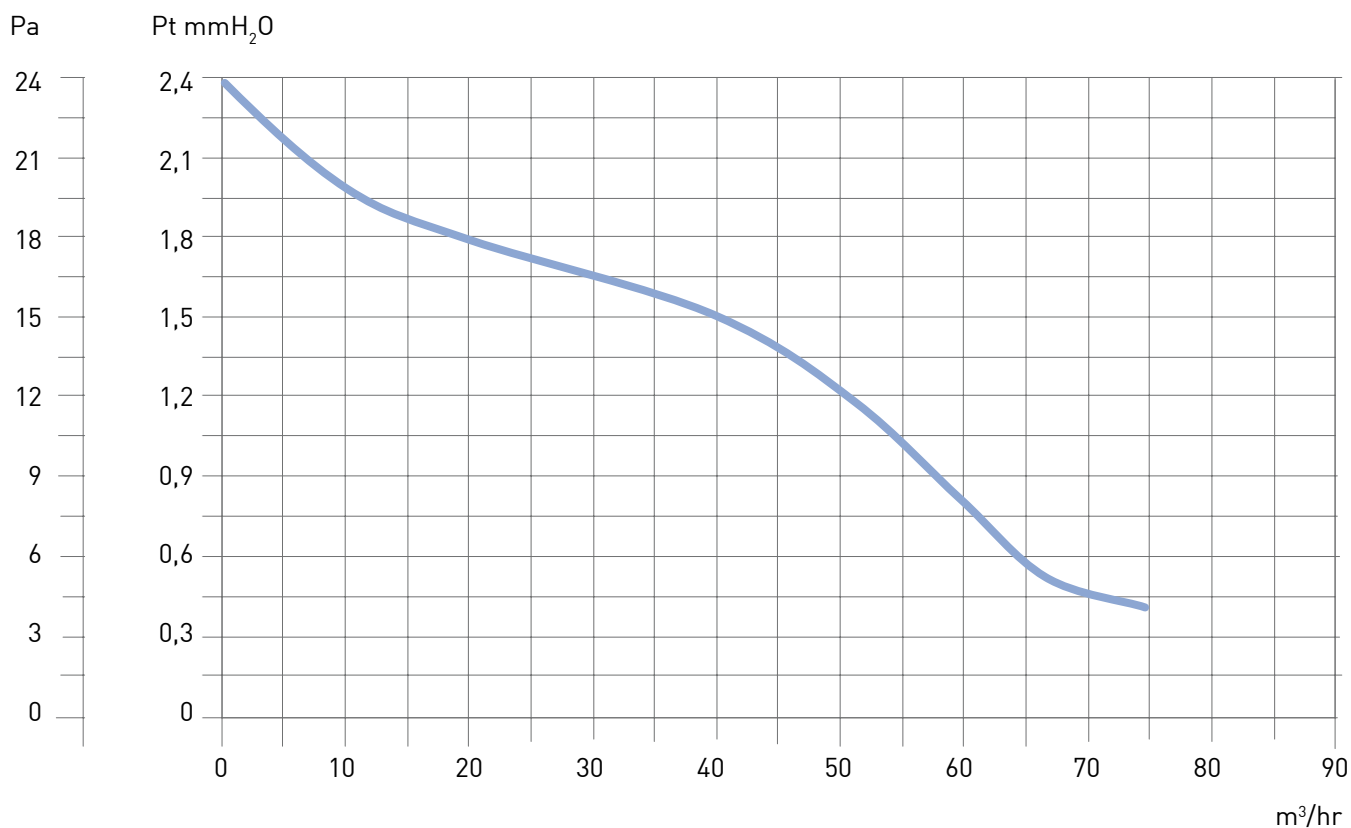

KL SERIES 12/5"

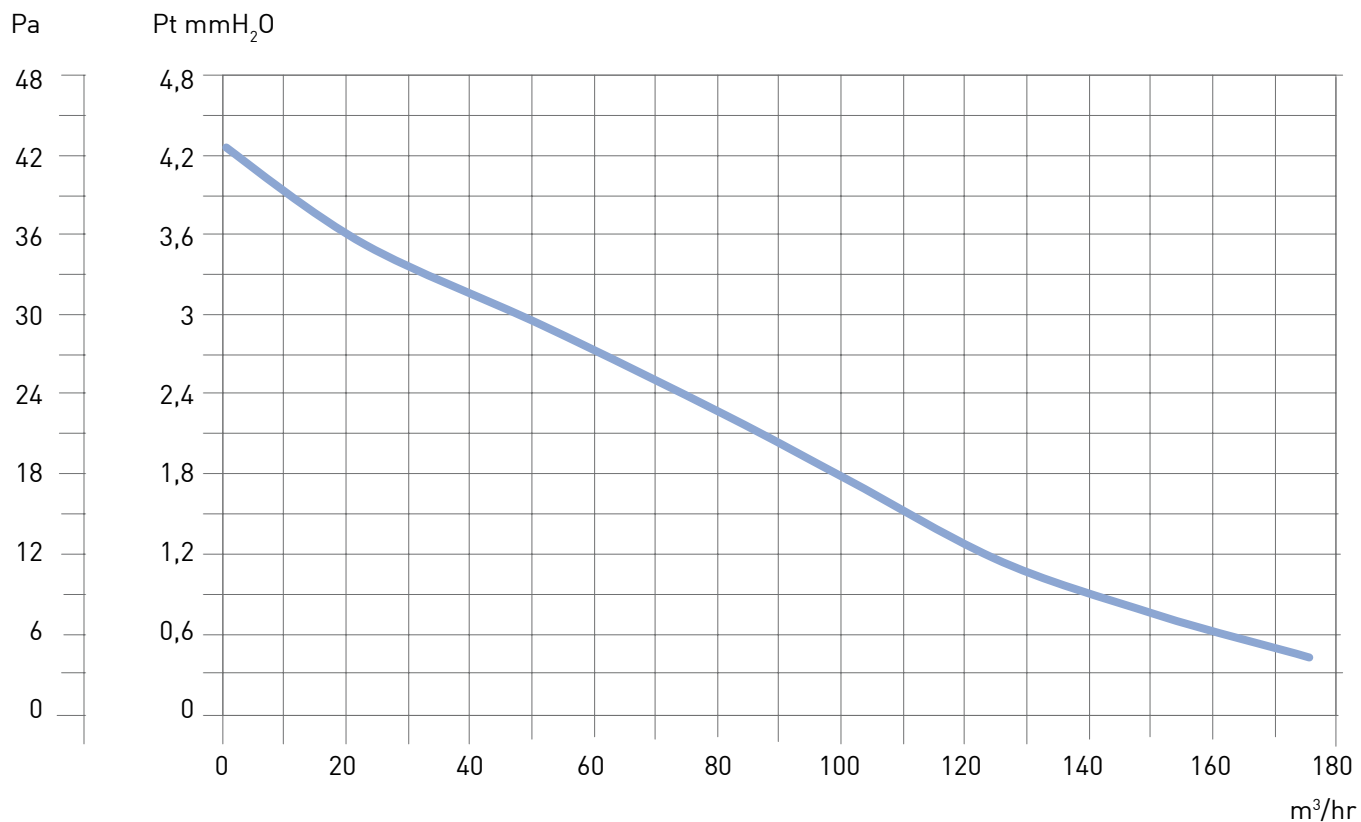

KL SERIES 15/6"

