


# Therm C48

## Flush-mounting room thermostat, with batteries, 1 temperature level

Flush-mounting electronic room thermostat suitable to regulate the temperature in the heating and cooling installations, civil and industrial.

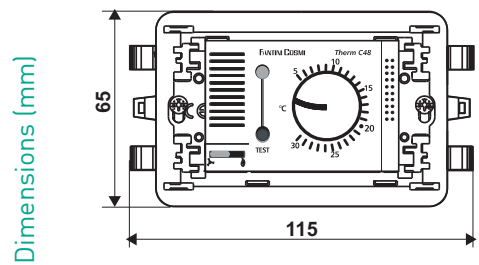

Dimensions (mm)

	temperature regulation range	differential	daily admissible temperature	Power supply	Contacts rating	Protection degree
--	------------------------------	--------------	------------------------------	--------------	-----------------	-------------------

C48	<input type="checkbox"/>	5 ÷ 30 °C	± 0,5 K	- 10 ÷ 50 °C	3 batteries AAA 1,5V	5(3)A 250Vac	IP20
-----	--------------------------	-----------	---------	--------------	----------------------	--------------	------


\* Differential values are referred to a thermal gradient of 4K/h.

- C48 ANTHRACITE
- C48B WHITE
- C48C SILVER



## ELECTRICAL FEATURES

Power supply with three 1,5V AAA alkaline long life batteries; electrical supply is not required.  
Micro disconnection (1B).  
Batteries operation life of approximately 4 years.

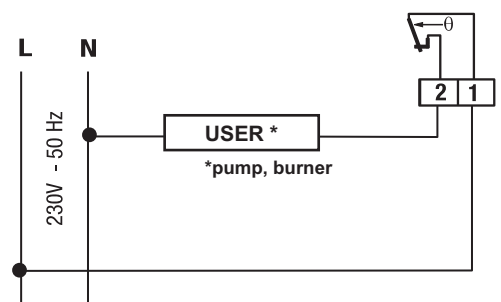

# HOMOLOGATION AND STANDARDS

---

Complies with EN 60730-2-9 standards  
ErP Class I; 1% (Reg. EU 811/2013 - 813/2013)



## INSTALLATION

---

Flush-mounting in 3-module 503 embedded boxes by means of 2 screws (supplied).

Two-wire connection with the user.

No changes are necessary to the existing system.

Can be applied, without any connection accessory, the following plates:

### COMPATIBLE PLATES

---

BTICINO Living International, Living di transizione

---

BTICINO Light, Light Tech

---

BTICINO Living-light round LNA and square LNB

---

BTICINO Axolute

---

VIMAR Idea, Rondò and Plana

---

GEWISS Playbus e Playbus Young

---

AVE sistema 45, Noir, Blanc

---

AVE Banquise, Ave Yes

---

Siemens Delta Futura Graphit

---

Legrand Vela square and round

---

## OPERATION

---

When the temperature increases: 1-2 opens.

## FEATURES

---

SUMMER-WINTER switch.

Adjustment knob for big diameter and large-scale.

double insulation.

Test button to check the batteries charge.

The batteries are replaced through thermostat's front.

Unit weight 0,13 Kg.

## ACCESSORIES

---

Adapters for 75x45 plates (standard, included in the package).