

FALSE CEILING CENTRIFUGAL FANS

ASPIRCEILING SERIES

- ➔ for duct application
- ➔ false ceiling mounting



Ø 100 mm

DESCRIPTION:

These products are designed to be flush mounted on false ceiling panels or on walls, leaving visible only the front grille, easy removable and with very thin profile. The performances, the silent functioning mode and the elegant design of the front grille are important factors for an easy integration in any domestic environment. The butterfly shutter prevents the return of smoke and odours in the environment and it functions as a particle filter (for grease, dust, etc.), completing in this way the technical features of these high quality products.




MAIN FEATURES:

- Made of shockproof and heat resistant ABS plastic.
- Induction motor - Insulation class B - 1400 Rpm with self lubricating bushes.
- Overheat protection incorporated in the motor.
- Non-return butterfly shutter included in the box.
- Applied on ceilings with panels up to 40 mm maximum thickness.

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H
ASPIRCEILING 170	294	294	106	200	25	201	201	98

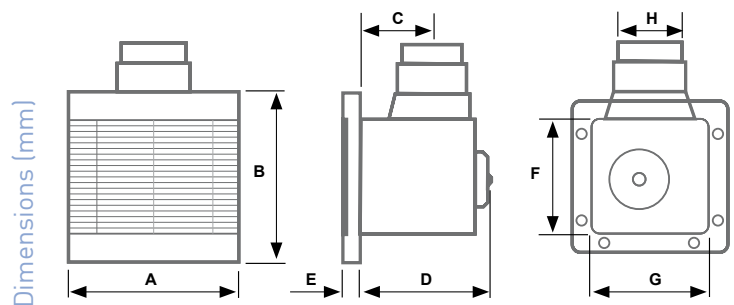

TECHNICAL SPECIFICATIONS

CODE	MODEL	m ³ /hr	Pt max mmH ₂ O	V	Hz	W	dB(A) 1,5mt	Kg
AP1891	ASPIRCEILING 170	170	6,80	230	50	29	45	1,8

CHARACTERISTIC CURVES

ASPIRCEILING 170

